


1.0-JJ / YG110001

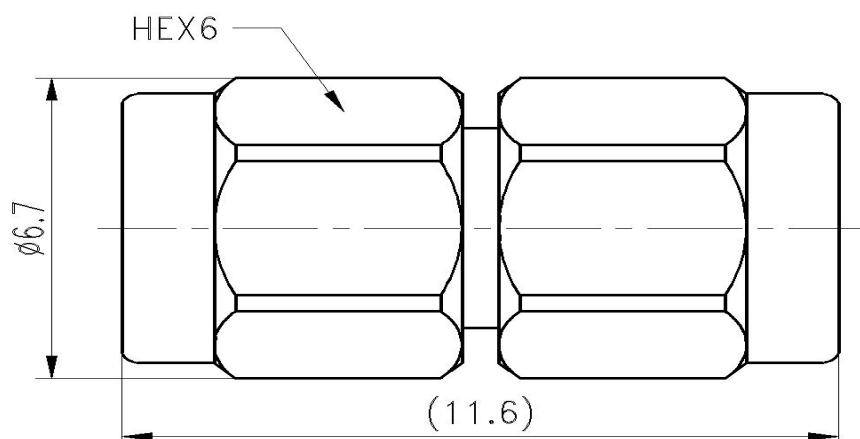

Configuration	
Connector 1	1.0 Male
Connector 2	1.0 Male
Connector Body	Stainless Steel (SUS303), Passivation
Connector Conductor	Beryllium Copper, Gold
Insulation	PEI
Electrical Specifications	
Impedance	50 Ω
Frequency Range	10MHz~110GHz
VSWR	≤ 1.4
Dielectric Withstand Voltage	500Vrms
Insertion Loss	$\leq 0.06\sqrt{f}(\text{GHz})\text{dB}$
Environment Data	
Working Temperature	-40 $^{\circ}\text{C}$ ~ +125 $^{\circ}\text{C}$