


YG-SMA/N-JFK/YG018084

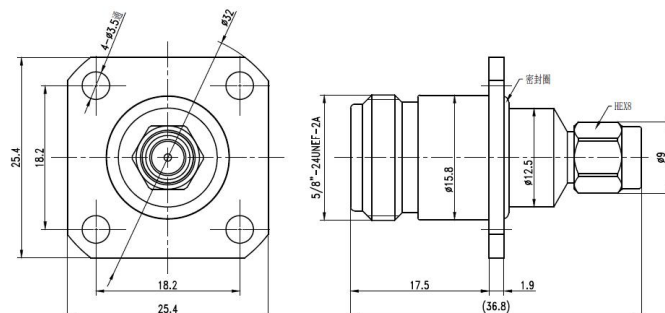

Configuration	
Connector 1	N Female
Connector 2	SMA Male
Connector Body	Stainless Steel Passivation
Connector Conductor	Beryllium Copper, Gold
Insulation	PTFE
Electrical Specifications	
Impedance	50Ω
Frequency Range	10MHz-18GHz
VSWR	≤1.2
Dielectric Withstand Voltage	500Vrms
Insertion Loss	≤0.05√f(GHz)dB
Environment Data	
Working Temperature	-40℃ ~ +125℃
Mechanical Properties	
Mechanical Life	500 cycles

sales@szyuge.com

<http://www.szyuge.com>

Rev. A