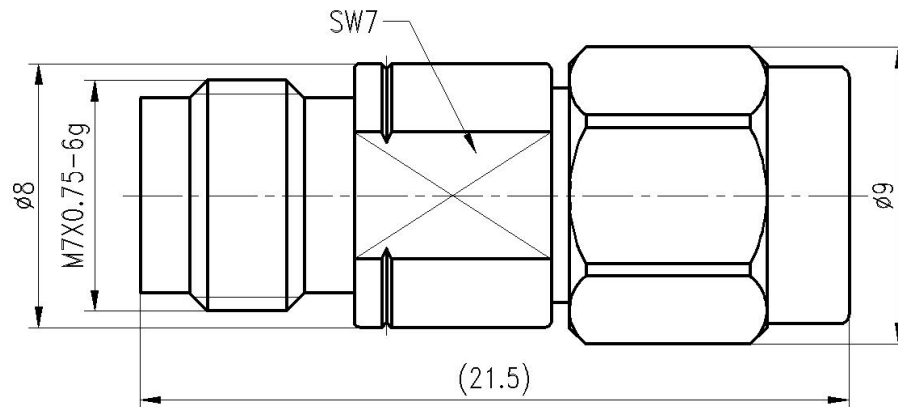


YG-2.4/3.5-KJ/ YG040031

Configuration	
Connector 1	2.4Female
Connector 2	3.5Male
Connector Body	Stainless Steel Passivation
Connector Conductor	Beryllium Copper, Gold
Insulation	PEI
Electrical Specifications	
Impedance	50Ω
Frequency Range	10MHz~26.5GHz
VSWR	≤1.15
Dielectric Withstand Voltage	500Vrms
Insertion Loss	≤0.04√f(GHz)dB
Environment Data	
Working Temperature	-40℃ ~ +125℃
Mechanical Properties	
Mechanical Life	500 cycles