


CG18-SMA-KF4/KF4-086-XXX

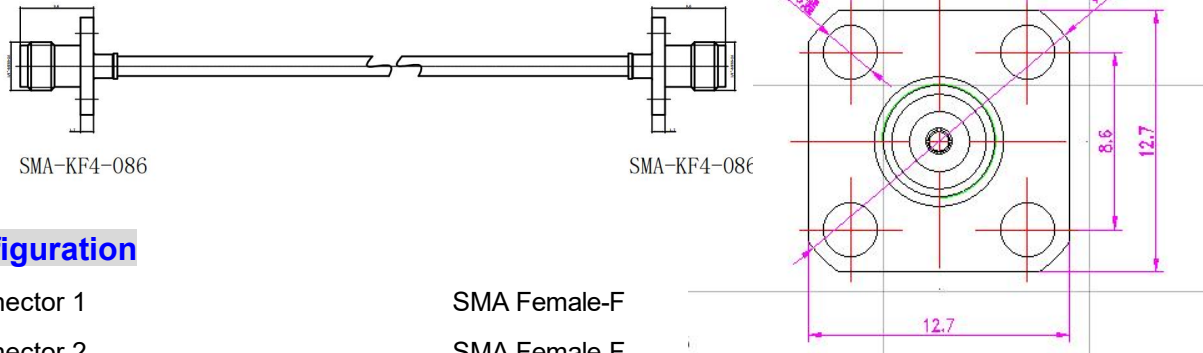

Configuration

Connector 1	SMA Female-F
Connector 2	SMA Female-F
Connector Body	Stainless Steel Passivation
Connector Conductor	Beryllium Copper, Gold
Insulation	PTFE
Cable Type	Semi-rigid Cable
Cable Diameter	086Cable

Electrical Specifications

Impedance	50Ω
Frequency Range	DC to 18GHz
Insertion Loss	< 1.6dB/0.5m,DC-18GHz
VSWR (Voltage Standing Wave Ratio)	≤1.3, DC to 18GHz
Dielectric withstand Voltage	750 V rms

Mechanical Properties

Mechanical Life	500 cycles
Bending Radius	5mm

Environment Data

Working Temperature	-55℃ ~ +125℃
---------------------	--------------

Order Information

P/N	Product Description
CG18-SMA-KF4/KF4-086-030	Semi-rigid Cable, SMA(KF4) /SMA(KF4)18GHz,Length 30cm
CG18-SMA-KF4/KF4-086-XXX	Semi-rigid Cable, SMA(KF4)/SMA(KF4) 18GHz,Length XXXcm