


CG12-SMA-J/JW-086-XXX

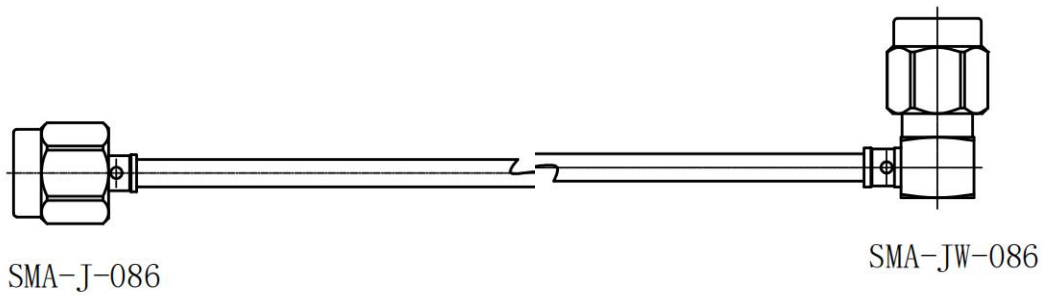

Configuration

Connector 1	SMA Male
Connector 2	SMA Male-R
Connector Body	Copper, Gold Plated
Connector Conductor	Beryllium Copper, Gold
Insulation	PTFE
Cable Type	Semi-rigid Cable
Cable Diameter	086Cable

Electrical Specifications

Impedance	50Ω
Frequency Range	DC to 12GHz
Insertion Loss	< 1.6dB/0.5m, DC-12GHz
VSWR (Voltage Standing Wave Ratio)	≤1.35, DC to 12GHz
Dielectric withstand Voltage	750 V rms

Mechanical Properties

Mechanical Life	500 cycles
Bending Radius	5mm

Environment Data

Working Temperature	-55°C ~ +125°C
---------------------	----------------

Order Information

P/N	Product Description
CG12-SMA-J/JW-086-030	Semi-rigid Cable, SMA-J/JW 12GHz, Length 30cm
CG12-SMA-J/JW-086-XXX	Semi-rigid Cable, SMA-J/JW 12GHz, Length XXXcm