


CG12-SMA-JW-086-XXX

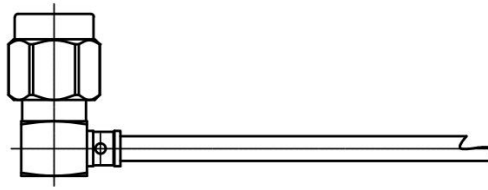

SMA-JW-086

Configuration

Connector 1	SMA Male-R
Connector 2	NA#
Connector Body	Copper, Gold plated
Connector Conductor	Beryllium Copper, Gold
Insulation	PTFE
Cable Type	Semi-rigid Cable
Cable Diameter	086Cable

Electrical Specifications

Impedance	50Ω
Frequency Range	DC to 12GHz
Insertion Loss	<1.6dB/0.5m,DC-12GHz
VSWR (Voltage Standing Wave Ratio)	≤1.35, DC to 12GHz
Dielectric withstand Voltage	750 V rms

Mechanical Properties

Mechanical Life	500 cycles
Bending Radius	5mm

Environment Data

Working Temperature	-55℃ ~ +125℃
---------------------	--------------

Order Information

P/N	Product Description
CG12-SMA-JW-086-030	Semi-rigid Cable, SMA-JW 12GHz,Length 30cm
CG12-SMA-JW-086-XXX	Semi-rigid Cable, SMA-JW 12GHz,Length XXXcm