


YG-2.4-KY01/YM0501010

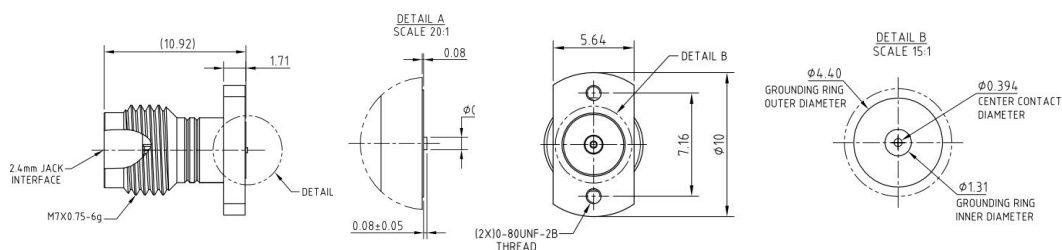

Configuration	
Connector 1	2.4 Female
Connector Body	Stainless Steel Passivation
Connector Conductor	Beryllium Copper, Gold
Insulation	PEI
Electrical Specifications	
Impedance	50Ω
Frequency Range	10MHz~50GHz
VSWR	≤1.4
Dielectric Withstand Voltage	500Vrms
Insertion Loss	≤0.03√f(GHz)dB,DC-50GHz
Environment Data	
Working Temperature	-40℃ ~ +155℃

Recommend PCB Layout

The right PCB Layout is reference only,
It is necessary to make a SI analysis before
Use the PCB Layout.

