


YG-SMA-KHD01

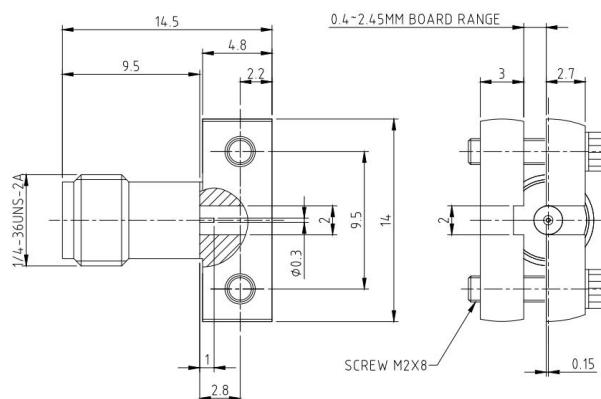

Configuration	
Connector	SMA Female
Connector Body	Brass Gold Plating
Connector Conductor	Bronze Gold Plating
Insulation	PTFE
Electrical Specifications	
Impedance	50Ω
Frequency Range	10MHz~26.5GHz
VSWR	≤1.35
Dielectric Withstand Voltage	650Vrms
Insertion Loss	≤0.05 x √f (GHz) dB,DC-26.5GHz
Environment Data	
Working Temperature	-40℃ ~ +105℃

Recommended PCB Layout

The right pcb Layout is reference only,
It is necessary to make a SI analysis before
Use the PCB Layout.

