


YG-SMA-KHD-25

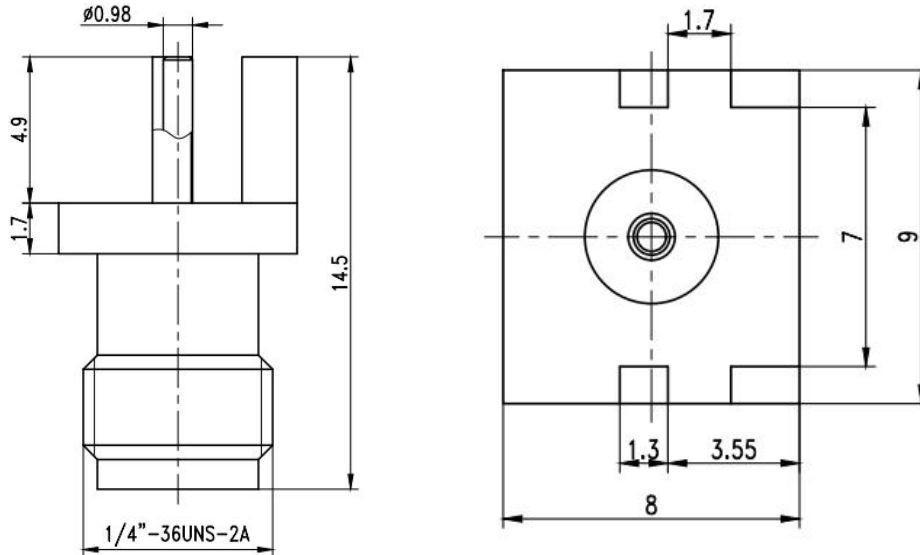

Configuration	
Connector	SMA Female
Connector Body	Brass Gold Plating
Connector Conductor	Beryllium Copper Gold Plating
Insulation	PTFE
PCB board thickness	1.7 mm
Pin	0.98mm
Electrical Specifications	
Impedance	50Ω
Frequency Range	DC-18GHz
VSWR	≤1.25
Dielectric Withstand Voltage	750Vrms
Environment Data	
Working Temperature	-40℃ ~ +165℃