
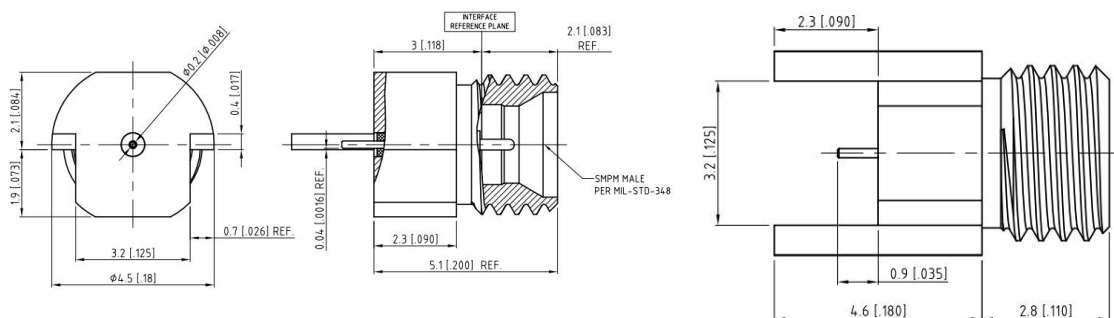




YG-SMPM-E-S-01



Configuration		
Connector	SMPM Male Full Detent	
Connector Body	Brass Gold Plating	
Connector Conductor	Beryllium Copper Gold Plating	
Insulation	PTFE	
Electrical Specifications		
Impedance	50Ω	
Frequency Range	10MHz~65GHz	
VSWR	≤1.5	
Dielectric Withstand Voltage	500Vrms	
Environment Data		
Working Temperature	-40℃ ~ +105℃	

Recommended PCB Layout

The right pcb Layout is reference only,
It is necessary to make a SI analysis before
Use the PCB Layout.

