


YG-SMA-KFD4635-22-030

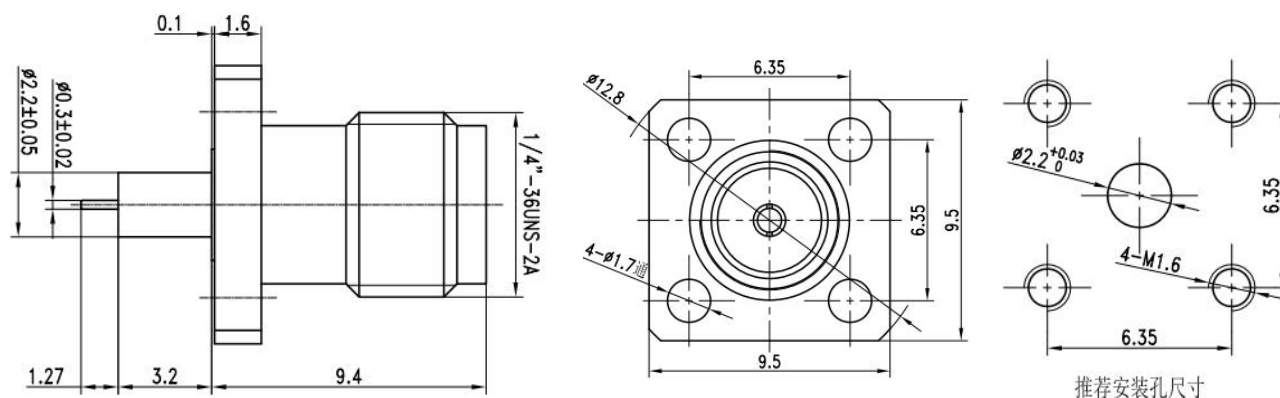

Configuration	
Connector 1	SMA Female
Connector 2 Diameter1	2.2 mm
Connector 2 Length1	3.2mm
Connector 2 Diameter2	0.3mm
Connector 2 Length2	1.27mm
Connector Body	Stainless Steel Passivation
Connector Conductor	Beryllium Copper, Gold
Insulation	PTFE/AIR
Electrical Specifications	
Impedance	50Ω
Frequency Range	DC-18GHz
VSWR	≤1.15
Dielectric Withstand Voltage	750Vrms
Environment Data	
Working Temperature	-55℃ ~ +165℃