


YG-SMA-KHD-09

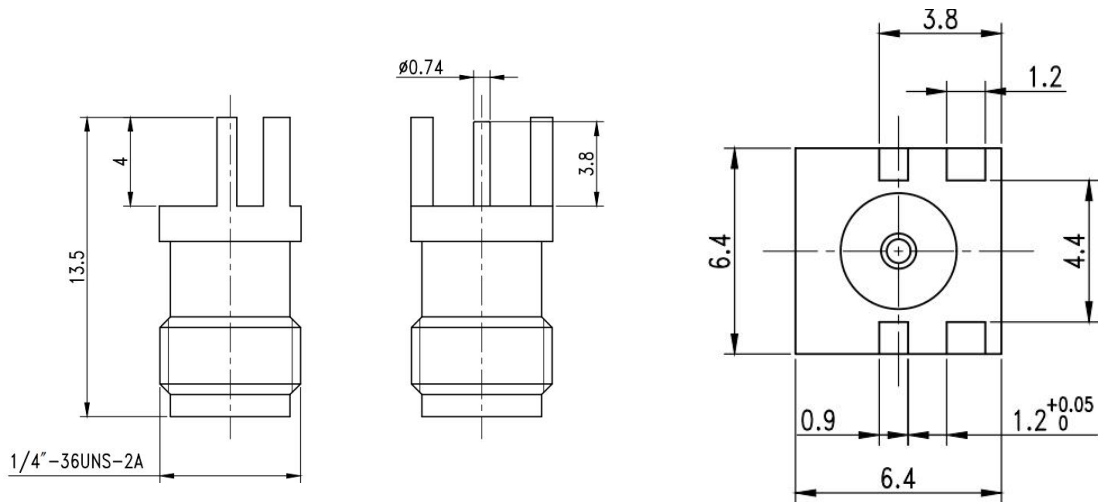

Configuration	
Connector	SMA Female
Connector Body	Brass Gold Plating
Connector Conductor	Beryllium Copper Gold Plating
Insulation	PTFE
PCB board thickness	1.2mm
Pin	0.74mm
Electrical Specifications	
Impedance	50Ω
Frequency Range	DC-18GHz
VSWR	≤1.25
Dielectric Withstand Voltage	750Vrms
Environment Data	
Working Temperature	-40℃ ~ +165℃