


## YG-SMA-KHD-03

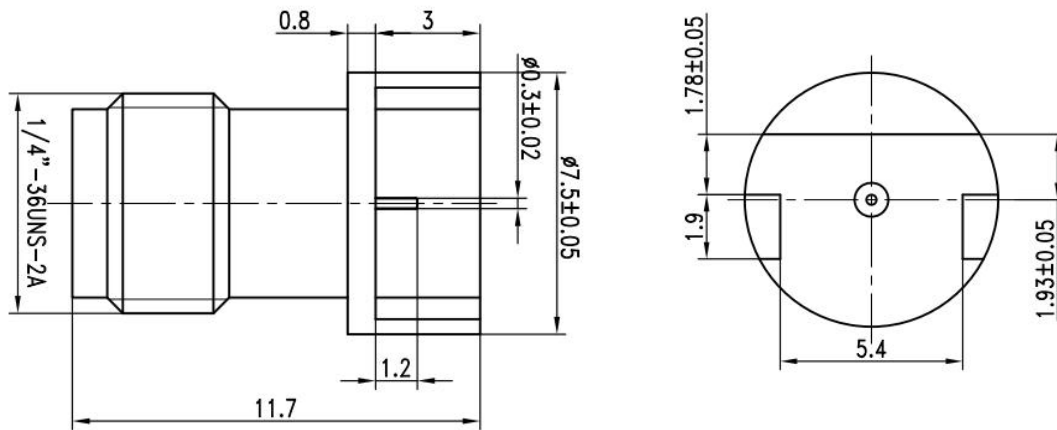

| Configuration                |                               |
|------------------------------|-------------------------------|
| Connector                    | SMA Female                    |
| Connector Body               | Brass Gold Plating            |
| Connector Conductor          | Beryllium Copper Gold Plating |
| Insulation                   | PTFE                          |
| PCB board thickness          | 1.78mm                        |
| PIN                          | 0.3mm                         |
| Electrical Specifications    |                               |
| Impedance                    | 50Ω                           |
| Frequency Range              | DC-18GHz                      |
| VSWR                         | ≤1.25                         |
| Dielectric Withstand Voltage | 500Vrms                       |
| Environment Data             |                               |
| Working Temperature          | -40℃ ~ +165℃                  |