


YG-2.4-J-1W

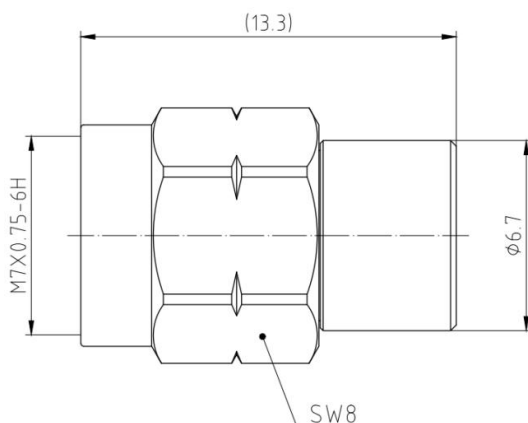

Configuration	
Connector	2.4 Male
Outer Body	Stainless Steel Passivation
Central Conductor	Beryllium Copper, Gold
Insulation	PEI
Electrical Specifications	
Impedance	50Ω
Frequency Range	DC-50GHz
VSWR	≤1.25@DC-50GHz
Average power	1W
Dielectric withstand voltage	1000vrms
Insulation resistance	≥5GΩ
Operating voltage	500 volts
Environment Data	
Working Temperature	-40℃ ~ +85℃