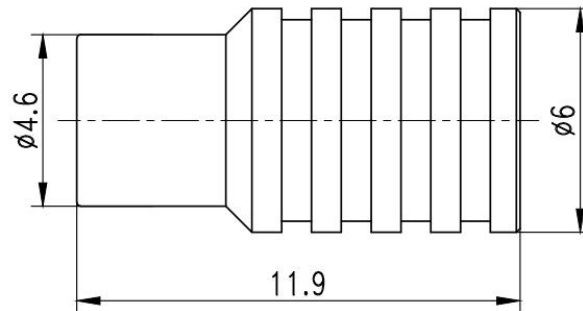


YG-SMP-J-2W

Configuration	
Connector	SMP Male
Outer Body	Copper, Gold Plated
Central Conductor	CuBe Copper, Gold Plated
Insulation	PTFE
Electrical Specifications	
Impedance	50Ω
Frequency Range	DC-26.5GHz
VSWR	≤1.25
Average power	2W
Environment Data	
Working Temperature	-55℃ ~ +125℃