


SMA-J/K-26.5-100V

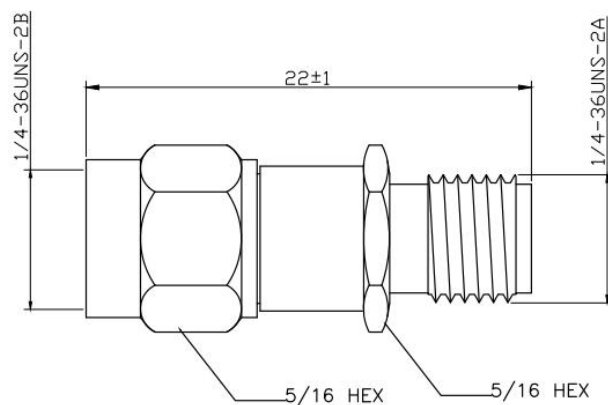

Configuration	
Connector 1	SMA Female
Connector 2	SMA Male
Outer Body	Stainless Steel Passivation
Central Conductor	Beryllium Copper, Gold
Insulation	PTFE
Electrical Specifications	
Impedance	50Ω
Frequency Range	200MHz to 26.5GHz
VSWR	≤1.35, @ 26.5GHz
Insertion Loss	<1.2dB@26.5GHz
Voltage Rating	100V
Environment Data	
Working Temperature	-55℃ ~ +125℃