


YG-SMA-J-1W

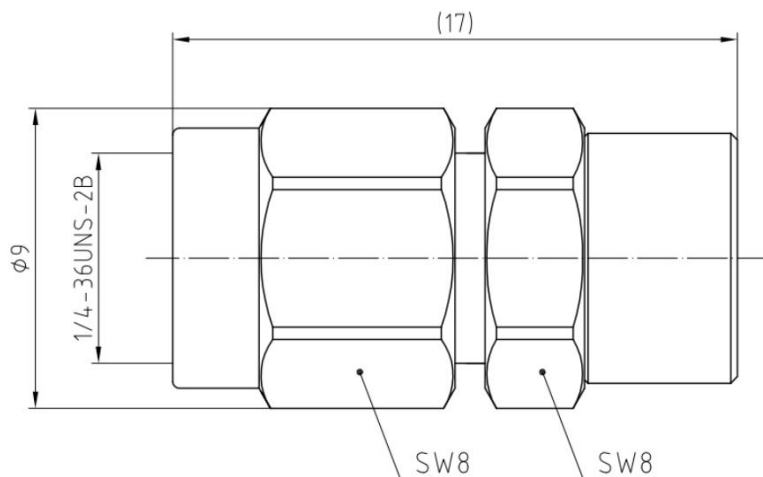

Configuration	
Connector	SMA Male
Outer Body	Stainless Steel Passivation
Central Conductor	Beryllium Copper, Gold
Insulation	PTFE
Electrical Specifications	
Impedance	50Ω
Frequency Range	DC-26.5GHz
VSWR	≤1.15@DC-18GHz; ≤1.2@DC-26.5GHz
Average power	1W
Dielectric withstand voltage	1000vrms
Insulation resistance	≥5GΩ
Operating voltage	500 volts
Environment Data	
Working Temperature	-40℃ ~ +85℃