


YG-SSMP-K-2W

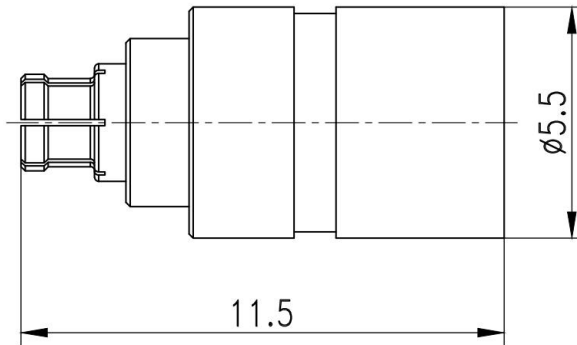

Configuration	
Connector	SSMP Female
Outer Body	Copper, Gold Plated
Central Conductor	CuBe Copper, Gold Plated
Insulation	PEI
Electrical Specifications	
Impedance	50 Ω
Frequency Range	DC-40GHz
VSWR	≤ 1.25
Average power	2W
Environment Data	
Working Temperature	-55 $^{\circ}$ C ~ +125 $^{\circ}$ C