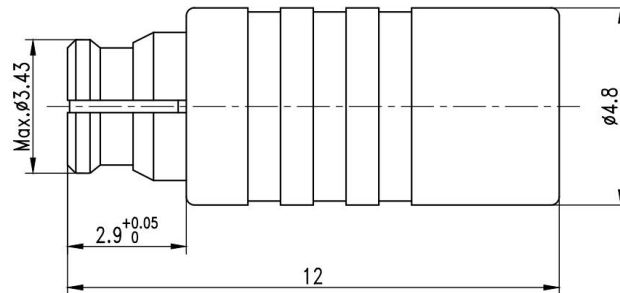


YG-SMP-K-2W-18

Configuration	
Connector	SMP Female
Outer Body	Copper, Gold Plated
Central Conductor	CuBe Copper, Gold Plated
Insulation	PTFE
Electrical Specifications	
Impedance	50Ω
Frequency Range	DC-18GHz
VSWR	≤1.3
Average power	2W
Environment Data	
Working Temperature	-55℃ ~ +125℃