


YG-2.92-K-2W

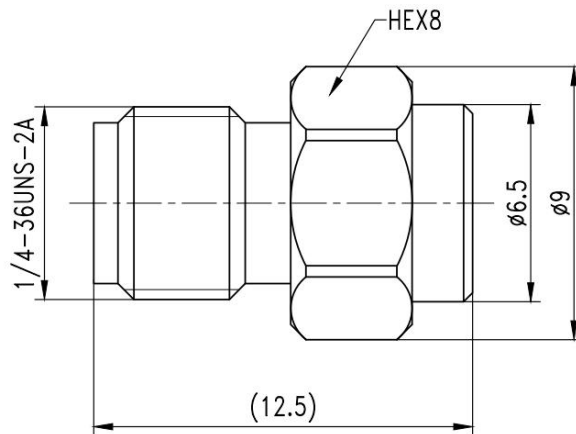

Configuration	
Connector	2.92mm Female
Outer Body	Stainless Steel Passivation
Central Conductor	CuBe Copper, Gold Plated
Insulation	PEI
Electrical Specifications	
Impedance	50Ω
Frequency Range	DC-40GHz
VSWR	≤1.2
Average power	2W
Environment Data	
Working Temperature	-55℃ ~ +125℃