


YG-2.92-KFD4635-065-12

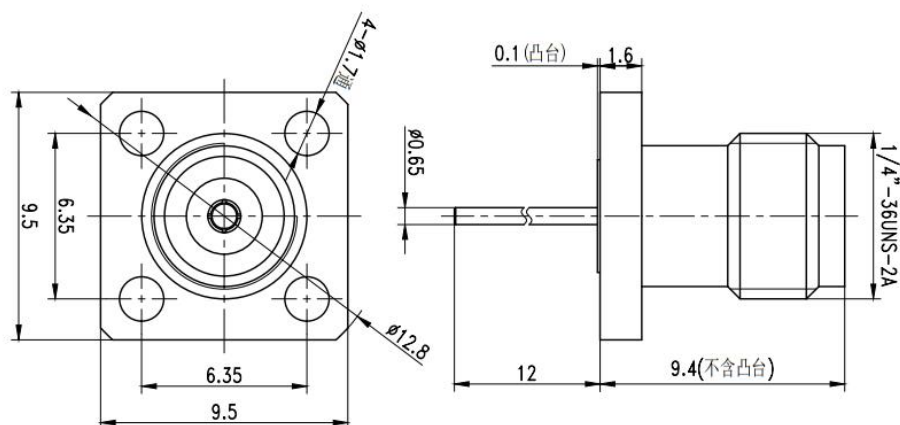

Configuration	
Connector 1	2.92 Female
Connector 2 Diameter	0.65mm
Connector 2 Length	12mm
Connector Body	Stainless Steel Passivation
Connector Conductor	Beryllium Copper, Gold
Insulation	PTFE/AIR
Electrical Specifications	
Impedance	50Ω
Frequency Range	DC-40GHz
VSWR	≤1.15
Dielectric Withstand Voltage	500Vrms
Environment Data	
Working Temperature	-55℃ ~ +165℃