


## YG-GPPO-K-1W

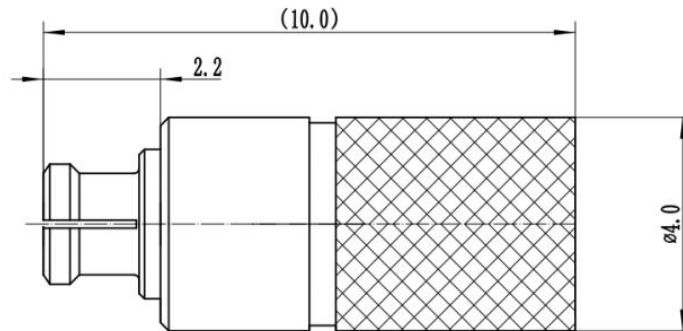

Configuration	
Connector	GPPO Female
Outer Body	Copper gold plated
Central Conductor	CuBe gold plated
Insulation	PTFE
Electrical Specifications	
Impedance	50Ω
Frequency Range	DC-40GHz
VSWR	≤1.3@DC-40GHz
Average power	1W
Dielectric withstand voltage	1000vrms
Insulation resistance	≥5GΩ
Operating voltage	500 volts
Environment Data	
Working Temperature	-40°C ~ +85°C