


2.92-J/K-40-50V

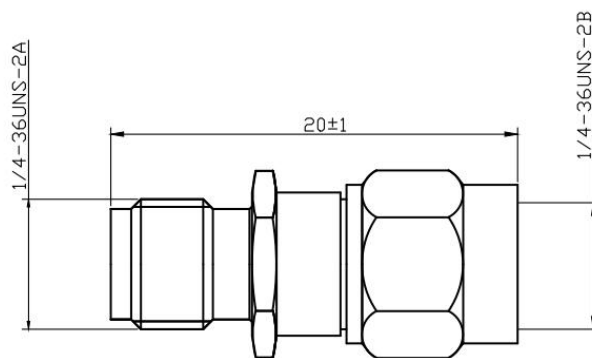

Configuration

Connector 1	2.92 Male
Connector 2	2.92 Female
Connector Body	Stainless Steel Passivate
Connector Conductor	Beryllium Copper, Gold
Insulation	PEI

Electrical Specifications

Impedance	50Ω
Frequency Range	100KHz to 40GHz
Insertion Loss	<1.1dB@40GHz
VSWR	≤1.35, @ 40GHz
Voltage Rating	50 V

Mechanical Properties

Mechanical Life	500 cycles
-----------------	------------

Environment Data

Working Temperature	-55℃ ~ +125℃
---------------------	--------------