



CA26-2.92-KY-E40-XXX



Configuration

Connector 1	2.92mm Female-Y
Connector 2	2.92mm Female-Y
Connector Body	Stainless Steel Passivation
Connector Conductor	Beryllium Copper, Gold
Insulation	PEI
Cable Type	Internal interconnection Cable
Cable Diameter	4.0mm

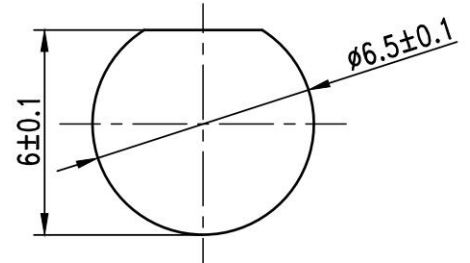

Electrical Specifications

Impedance	50Ω
Frequency Range	DC to 26.5GHz
Insertion Loss	<3.2dB/m,DC-26.5G
VSWR	≤1.30, DC to 26.5GHz
Dielectric withstand Voltage	500 V rms

Mechanical Properties

Mechanical Life	500 cycles
Bending Radius	40 mm

Environment Data

Working Temperature	-55℃ ~ +125℃
---------------------	--------------

Order Information

P/N	Product Description
CA26-2.92-KY-E40-030	Internal interconnection Cable, 2.92(KY) to 2.92(KY),26.5GHz,Length 30cm
CA26-2.92-KY-E40-XXX	Internal interconnection Cable, 2.92(KY) to 2.92(KY),26.5GHz,Length XXXcm