



CA18-SMA-KY/N-J-E40-XXX



Configuration

Connector 1	SMA Female-Y
Connector 2	N Male
Connector Body	Stainless Steel Passivation
Connector Conductor	Beryllium Copper, Gold
Insulation	PTFE
Cable Type	Internal interconnection Cable
Cable Diameter	4.0mm

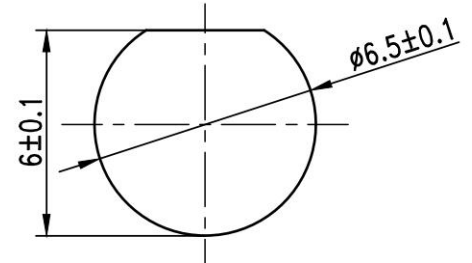

Electrical Specifications

Impedance	50 Ω
Frequency Range	DC to 18GHz
Insertion Loss	<2.5dB/m,DC-18G
VSWR	≤ 1.3 , DC to 18GHz
Dielectric withstand Voltage	750 V rms

Mechanical Properties

Mechanical Life	500 cycles
Bending Radius	40mm

Environment Data

Working Temperature	-55 $^{\circ}$ C ~ +125 $^{\circ}$ C
---------------------	--------------------------------------

Order Information

P/N	Product Description
CA18-SMA-KY/N-J-E40-030	Internal interconnection Cable, SMA(KY) to N(M),18GHz,Length 30cm
CA18-SMA-KY/N-J-E40-XXX	Internal interconnection Cable, SMA(KY) to N(M)),18GHz,Length XXXcm