


## YG-2.92-SSMA-KK/ YG040058

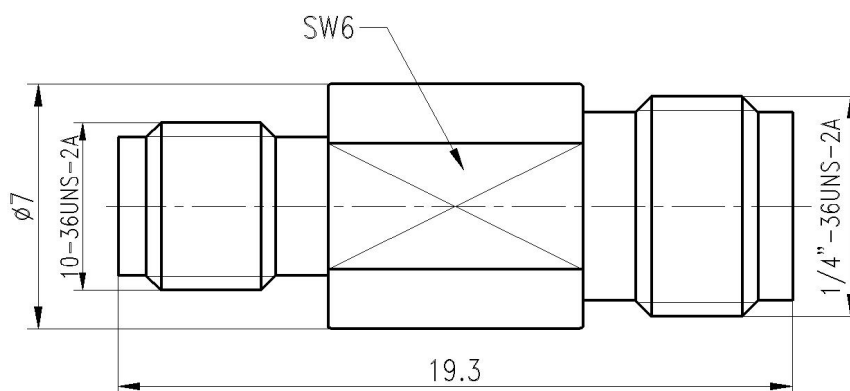

| Configuration                |                             |
|------------------------------|-----------------------------|
| Connector 1                  | SSMA Female                 |
| Connector 2                  | 2.92 Female                 |
| Connector Body               | Stainless Steel Passivation |
| Connector Conductor          | Beryllium Copper, Gold      |
| Insulation                   | PEI                         |
| Electrical Specifications    |                             |
| Impedance                    | 50Ω                         |
| Frequency Range              | 10MHz~40GHz                 |
| VSWR                         | ≤1.15                       |
| Dielectric Withstand Voltage | 500Vrms                     |
| Insertion Loss               | ≤0.04√f(GHz)dB              |
| Environment Data             |                             |
| Working Temperature          | -40℃ ~ +125℃                |
| Mechanical Properties        |                             |
| Mechanical Life              | 500 cycles                  |