


YG-SMA-SSMA-KJ YG018074

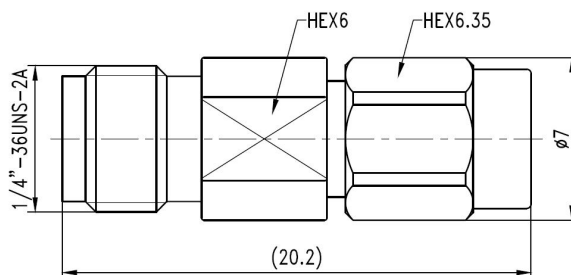

Configuration	
Connector 1	SMA Female
Connector 2	SSMA Male
Connector Body	Stainless Steel Passivation
Connector Conductor	Beryllium Copper, Gold
Insulation	PTFE
Electrical Specifications	
Impedance	50Ω
Frequency Range	10MHz-26.5GHz
VSWR	≤1.15
Dielectric Withstand Voltage	500Vrms
Insertion Loss	≤0.05√f(GHz)dB
Environment Data	
Working Temperature	-40℃ ~ +125℃
Mechanical Properties	
Mechanical Life	500 cycles