


YG-2.92-SSMA-KJ/ YG040057

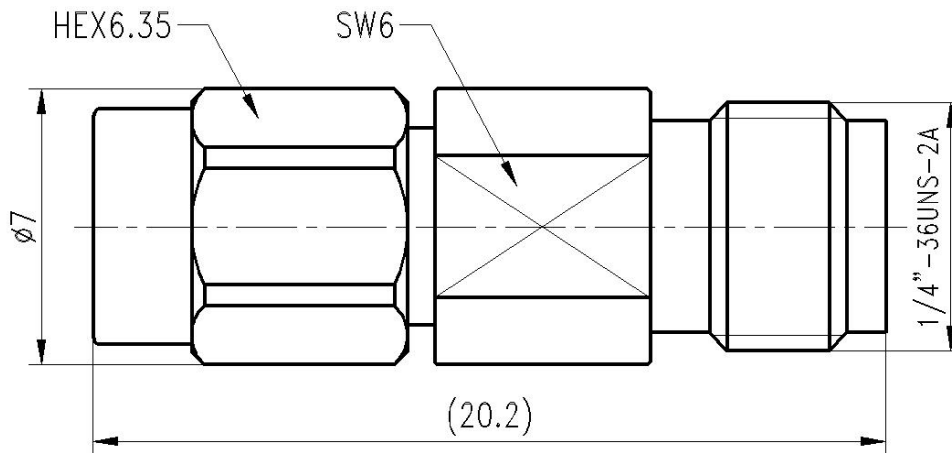

Configuration	
Connector 1	SSMA Male
Connector 2	2.92 Female
Connector Body	Stainless Steel Passivation
Connector Conductor	Beryllium Copper, Gold
Insulation	PEI
Electrical Specifications	
Impedance	50 Ω
Frequency Range	10MHz~40GHz
VSWR	≤ 1.15
Dielectric Withstand Voltage	500Vrms
Insertion Loss	$\leq 0.04\sqrt{f(\text{GHz})}\text{dB}$
Environment Data	
Working Temperature	-40 $^{\circ}\text{C}$ ~ +125 $^{\circ}\text{C}$
Mechanical Properties	
Mechanical Life	500 cycles