


YG-SMA-JWJ/ YG018065

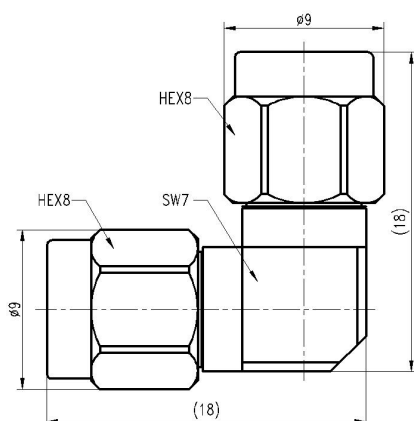

Configuration	
Connector 1	SMA Male
Connector 2	SMA Male
Connector Body	Stainless Steel Passivation
Connector Conductor	Beryllium Copper, Gold
Adapter body style	Right angle
Insulation	PEI
Electrical Specifications	
Impedance	50Ω
Frequency Range	10MHz-18GHz
VSWR	≤1.15
Dielectric Withstand Voltage	500Vrms
Insertion Loss	≤0.08√f(GHz)dB
Environment Data	
Working Temperature	-40℃ ~ +125℃
Mechanical Properties	
Mechanical Life	500 cycles