


YG-2.4-KHD-E01

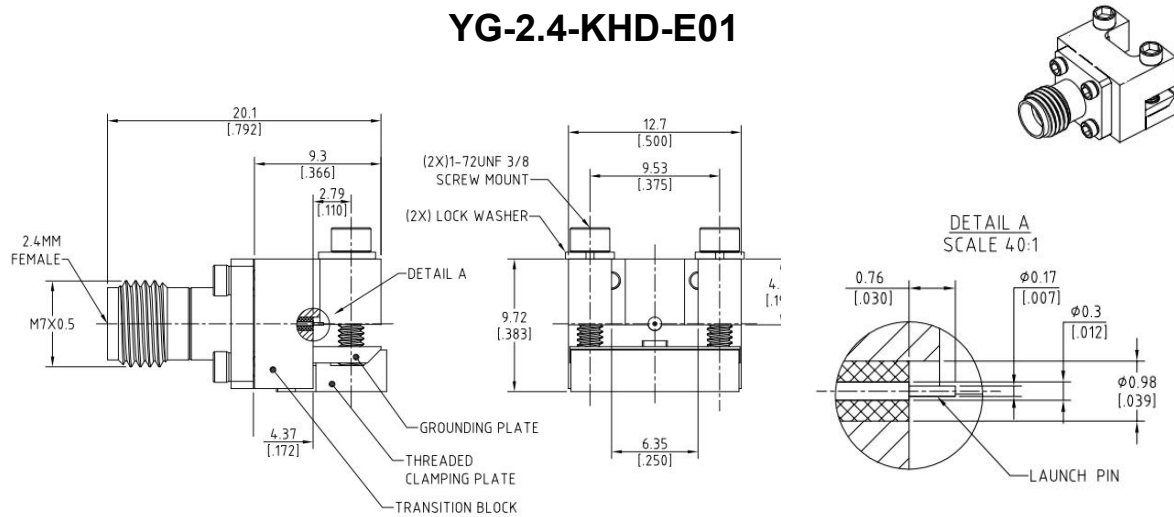

Configuration	
Connector	2.4mm Female
Connector Body	Stainless Steel Passivation
Connector Conductor	Beryllium Copper, Gold
Insulation	PEI
Electrical Specifications	
Impedance	50Ω
Frequency Range	10MHz~50GHz
VSWR	≤1.4
Dielectric Withstand Voltage	500Vrms
Insertion Loss	≤0.05 x √f (GHz) dB,DC-50GHz
Environment Data	
Working Temperature	-40℃ ~ +155℃

Recommended PCB Layout

The right PCB Layout is reference only,
It is necessary to make a SI analysis before
Use the PCB Layout.

