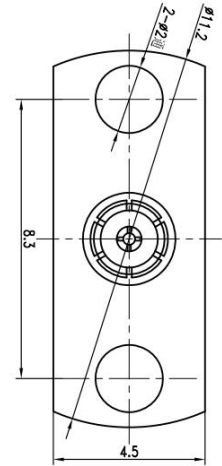

CA40-2.92-KY/SSMP-KF-E28-XXX

Configuration

Connector 1	2.92mm Female-Y
Connector 2	SSMP Female-F
Connector Body	Stainless Steel Passivation
Connector Conductor	Beryllium Copper, Gold
Insulation	PEI
Cable Type	Internal interconnection Cable
Cable Diameter	2.65mm

Electrical Specifications

Impedance	50Ω
Frequency Range	DC to 40GHz
Insertion Loss	<5.5dB/m,DC-40G
VSWR	≤1.40, DC to 40GHz
Dielectric withstand Voltage	500 V rms

Mechanical Properties

Mechanical Life	500 cycles
Bending Radius	26 mm

Environment Data

Working Temperature	-55℃ ~ +125℃
---------------------	--------------

Order Information

P/N	Product Description
CA40-2.92-KY/SSMP-KF-E28-030	Internal interconnection Cable, 2.92(KY) to SSMP(KF),40GHz,Length 30cm
CA40-2.92-KY/SSMP-KF-E28-XXX	Internal interconnection Cable, 2.92(KY) to SSMP(KF),40GHz,Length XXXcm