


YG-SMA-KY01/YM040103

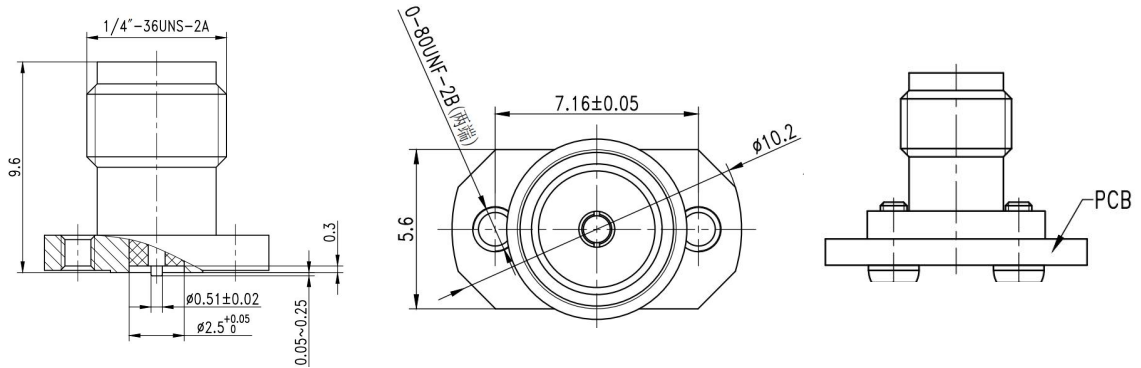

Configuration	
Connector 1	SMA Female
Connector Body	Stainless Steel Passivation
Connector Conductor	Beryllium Copper, Gold
Insulation	PTFE
Electrical Specifications	
Impedance	50Ω
Frequency Range	10MHz~26.5GHz
VSWR	≤1.25
Dielectric Withstand Voltage	750 Vrms
Insertion Loss	≤0.03√f(GHz)dB,DC-26.5GHz
Environment Data	
Working Temperature	-40℃ ~ +155℃

Recommend PCB Layout

The right PCB Layout is reference only,
It is necessary to make a SI analysis before
Use the PCB Layout.

