


CM70-YB70A-E0-08-23-XXX

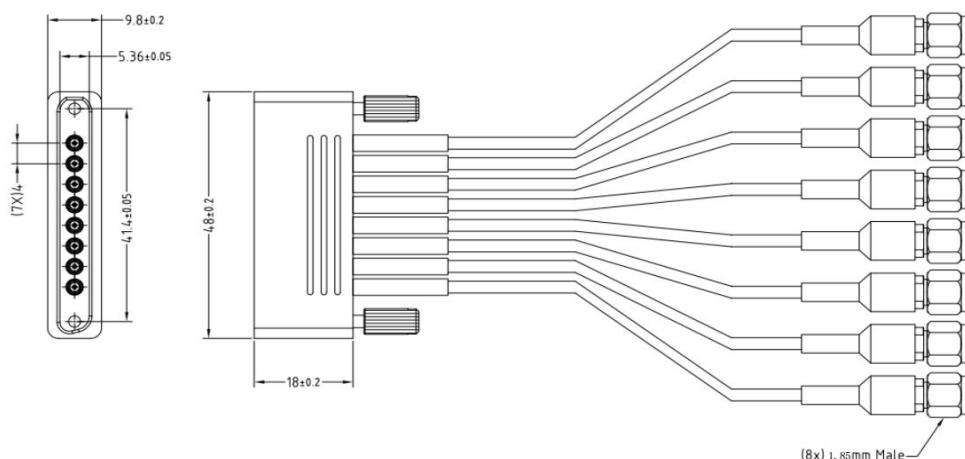

Configuration

Connector 1	YB70A Female(SMPM)
Connector 2	1.85 mm Male
Connector Body	Aluminium Alloy
Cable Type	Low Loss Stable Phase Test Cable
Cable Diameter	2.3mm

Electrical Specifications

Impedance	50Ω
Frequency Range	DC to 67GHz
Insertion Loss	<6.6dB/m,DC-67G
VSWR	≤1.5, DC to 67GHz
Dielectric withstand Voltage	500 V rms
Different Cable Phase Match	±2PS

Mechanical Properties

Mechanical Life	500 cycles
Bending Radius	23mm

Environment Data

Working Temperature	-55℃ ~ +125℃

Order Information

P/N	Product Description
CM70-YB70A-E0-08-23-050	Multicoax cable assembly, YB70A to 1.85 (M),1X8,67GHz,Length 50cm
CM70-YB70A-E0-08-23-XXX	Multicoax cable assembly, YB70A to 1.85 (M),1X8,67GHz,Length XXXcm