


CM70-YB70-E0-08-23-XXX

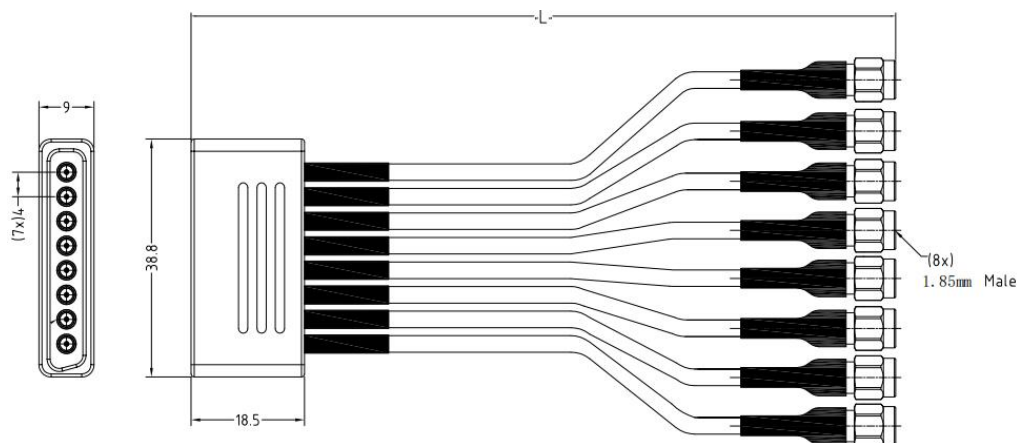

Configuration

Connector 1	YB70 Female(SMPM)
Connector 2	1.85mm Male
Connector Body	Aluminium Alloy
Cable Type	Low Loss Stable Phase Test Cable
Cable Diameter	2.3mm

Electrical Specifications

Impedance	50Ω
Frequency Range	DC to 67GHz
Insertion Loss	<6.6dB/m,DC-67GHz
VSWR	≤1.5, DC to 67GHz
Dielectric withstand Voltage	500 V rms
Different Cable Phase Match	±2PS

Mechanical Properties

Mechanical Life	500 cycles
Bending Radius	23mm

Environment Data

Working Temperature	-55℃ ~ +125℃

Order Information

P/N	Product Description
CM70-YB70-E0-08-23-050	Multicoax cable assembly, YB70 to 1.85(M), 1X8, 67GHz, Length 50cm
CM70-YB70-E0-08-23-XXX	Multicoax cable assembly, YB70 to 1.85(M), 1X8, 67GHz, Length XXXcm