


YG-2.92-KFD2122-030-1

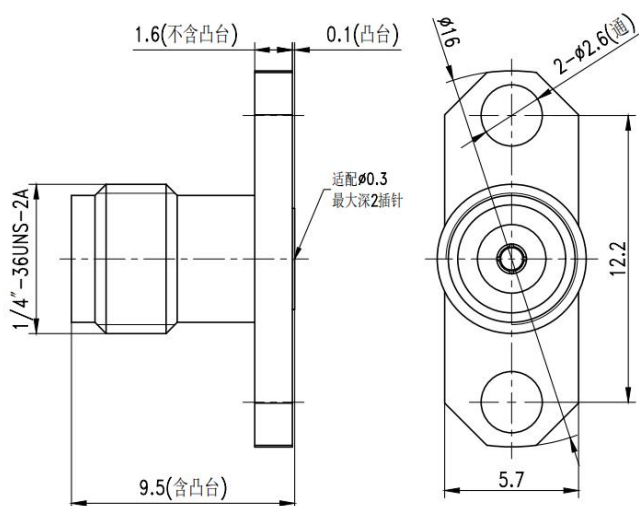

Configuration	
Connector 1	2.92 Female
Connector 2	0.3mm Jack
Connector Body	Stainless Steel Passivation
Connector Conductor	Beryllium Copper, Gold
Insulation	PTFE/AIR
Electrical Specifications	
Impedance	50Ω
Frequency Range	DC-40GHz
VSWR	≤1.2
Dielectric Withstand Voltage	500Vrms
Environment Data	
Working Temperature	-55℃ ~ +165℃