


YG-SMA26-MF-2W-XX

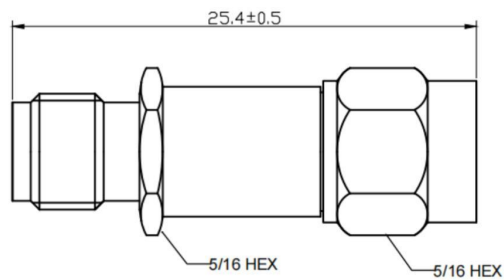

Configuration									
Connector1	SMA Male								
Connector2	SMA Female								
Outer Body	Stainless Steel Passivation								
Central Conductor	CuBe Copper, Gold Plated								
Insulation	PTFE								
Electrical Specifications									
Impedance	50Ω								
Frequency Range	DC-26.5GHz								
VSWR	≤1.3Max								
Power	2W								
Attenuator value	<table border="1" style="display: inline-table; border-collapse: collapse;"> <tr> <td>1-9dB</td> <td>10dB</td> <td>20dB</td> <td>30dB</td> </tr> <tr> <td>±0.5</td> <td>±0.75</td> <td>±1</td> <td>±1</td> </tr> </table>	1-9dB	10dB	20dB	30dB	±0.5	±0.75	±1	±1
1-9dB	10dB	20dB	30dB						
±0.5	±0.75	±1	±1						
Environment Data									
Working Temperature	-55℃ ~ +125℃								