


CK67-1.85-J/J-22-XXX

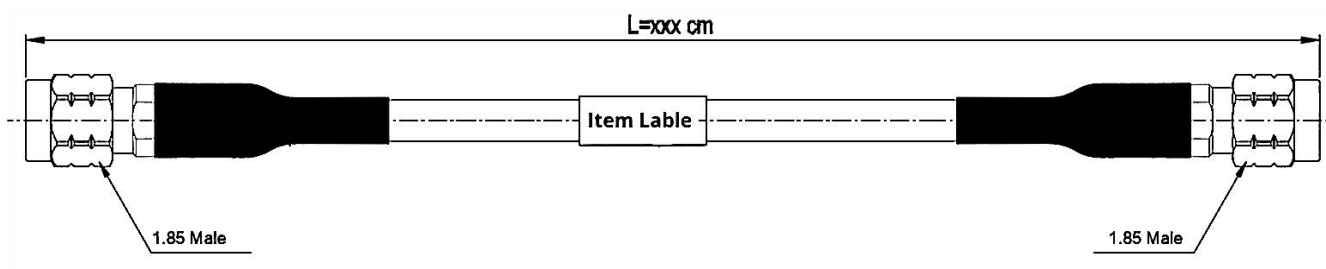

Configuration

Connector 1	1.85 Male
Connector 2	1.85Male
Connector Body	Stainless steel Passivation
Connector Conductor	Beryllium Copper, Gold
Insulation	PEI
Cable Type	Low Loss Stable Phase Test Cable
Cable Diameter	5.0 mm

Electrical Specifications

Impedance	50Ω
Frequency Range	DC to 67GHz
Insertion Loss	<6.2dB/m@ DC-67G
VSWR	≤1.3, DC to 67GHz
Dielectric withstand Voltage	500 V rms
Mechanical Phase Stability	±7 Degree Max.
Amplitude Stability	+0.1dB Max.
Different Cable Phase Match	±8 Degree Max.

Mechanical Properties

Mechanical Life	500 cycles
Bending Radius	50 mm

Environment Data

Working Temperature	-55℃ ~ +125℃
---------------------	--------------

Order Information

P/N	Product Description
CK67-1.85-J/J-22-030	Low Loss Stable Phase Test Cable,1.85(M) to 1.85(M),67GHz,Length 30cm
CK67-1.85-J/J-22-XXX	Low Loss Stable Phase Test Cable, 1.85(M) to 1.85(M)67GHz,Length XXXcm