


CK26-3.5-JJ-50-XXX

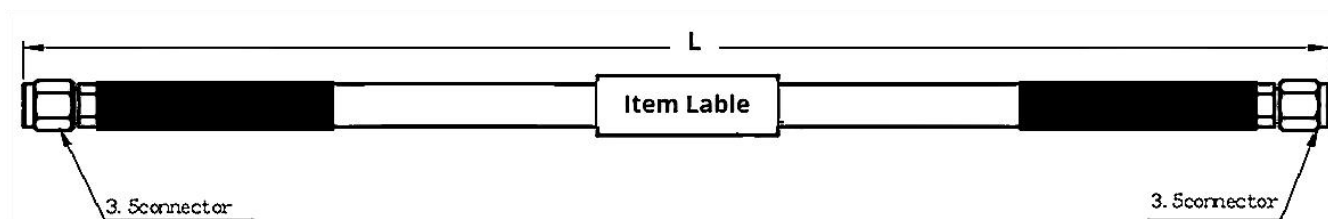

Configuration

Connector 1	3.5mm Male
Connector 2	3.5mm Male
Connector Body	Stainless Steel Passivation
Connector Conductor	Beryllium Copper, Gold
Insulation	PEI
Cable Type	Low Loss Stable Phase Test Cable
Cable Diameter	9.15 mm

Electrical Specifications

Impedance	50Ω
Frequency Range	DC to 26.5GHz
Insertion Loss	≤2.1dB/m, DC to 26.5GHz
VSWR	≤1.25, DC to 26.5GHz
Dielectric withstand Voltage	750 V rms
Mechanical Phase Stability	±5 Degree Max.
Amplitude Stability	+0.05dB Max.
Different Cable Phase Match	±8 Degree Max.

Mechanical Properties

Mechanical Life	500 cycles
Bending Radius	92 mm

Environment Data

Working Temperature	-55℃ ~ +125℃
---------------------	--------------

Order Information

P/N	Product Description
CK26-3.5-JJ-50-100	Low Loss Stable Phase Test Cable, 3.5(M) to 3.5(M),26.5GHz,Length 100cm
CK26-3.5-JJ-50-XXX	Low Loss Stable Phase Test Cable, 3.5(M) to 3.5(M),26.5GHz,Length XXXcm