


YG-SMA18-MF-5W-XX

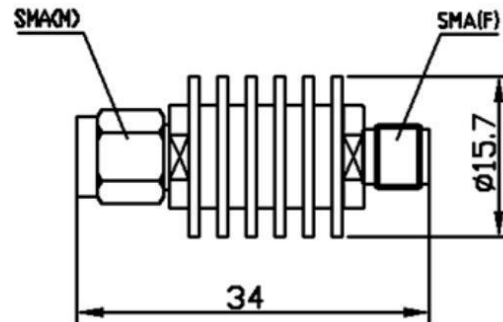

Configuration	
Connector1	SMA Male
Connector2	SMA Female
Outer Conductor	Stainless Steel Passivation
Body	Aluminum oxidation Blacked
Central Conductor	CuBe Copper, Gold Plated
Insulation	PTFE
Electrical Specifications	
Impedance	50Ω
Frequency Range	DC-18GHz
VSWR	≤1.3Max
Power	2W
Attenuator value	1-9dB 10dB 20dB 30dB 40dB ±0.5 ±0.75 ±1 ±1 ±1.5
Environment Data	
Working Temperature	-55℃ ~ +125℃