


YG-2.92-MF-2W-XX

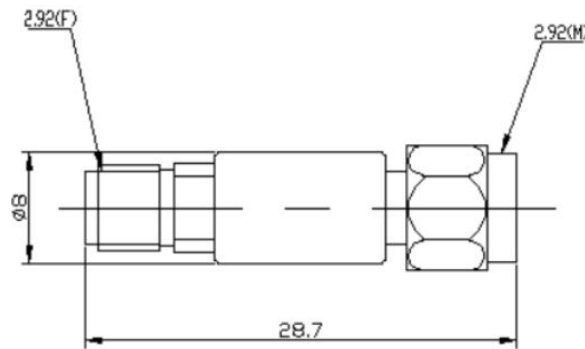

Configuration	
Connector1	2.92 Male
Connector2	2.92 Female
Outer Body	Stainless Steel Passivation
Central Conductor	CuBe Copper, Gold Plated
Insulation	PEI
Electrical Specifications	
Impedance	50Ω
Frequency Range	DC-40GHz
VSWR	≤1.3Max
Power	2W
Attenuator value	1-9dB 10dB 20dB 30dB ±01 ±0.1 ±1 ±1
Environment Data	
Working Temperature	-55℃ ~ +125℃