


CK26-3.5-JJ-40-XXX

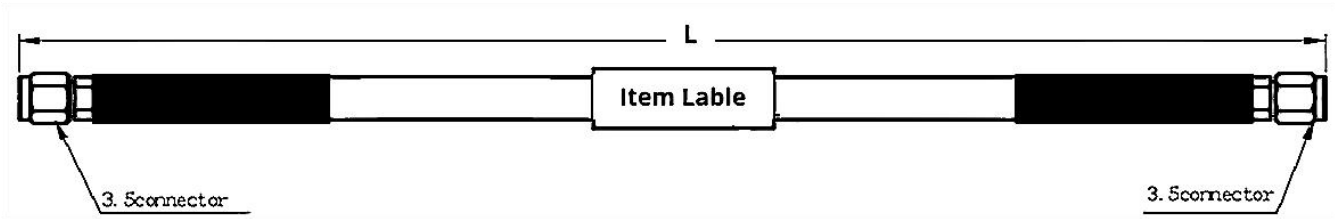

## Configuration

Connector 1	3.5mm Male
Connector 2	3.5mm Male
Connector Body	Stainless Steel Passivation
Connector Conductor	Beryllium Copper, Gold
Insulation	PEI
Cable Type	Low Loss Stable Phase Test Cable
Cable Diameter	7.55 mm

## Electrical Specifications

Impedance	50Ω
Frequency Range	DC to 26.5GHz
Insertion Loss	≤2.7dB/m, DC to 26.5GHz
VSWR	≤1.25, DC to 26.5GHz
Dielectric withstand Voltage	750 V rms
Mechanical Phase Stability	±5 Degree Max.
Amplitude Stability	+0.05dB Max.
Different Cable Phase Match	±8 Degree Max.

## Mechanical Properties

Mechanical Life	500 cycles
Bending Radius	75 mm

## Environment Data

Working Temperature	-55°C ~ +125°C
---------------------	----------------

## Order Information

P/N	Product Description
CK26-3.5-JJ-40-100	Low Loss Stable Phase Test Cable, 3.5(M) to 3.5(M),26.5GHz,Length 100cm
CK26-3.5-JJJ-40-XXX	Low Loss Stable Phase Test Cable, 3.5(M) to 3.5(M),26.5GHz,Length XXXcm