


YG-SMA18-MF-2W-XX

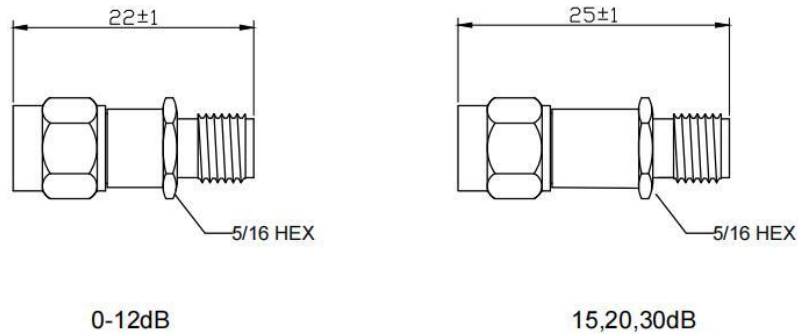

Configuration					
Connector1	SMA Male				
Connector2	SMA Female				
Outer Body	Stainless Steel Passivation				
Central Conductor	CuBe Copper, Gold Plated				
Insulation	PTFE				
Electrical Specifications					
Impedance	50Ω				
Frequency Range	DC-18GHz				
VSWR	≤1.25Max				
Power	2W				
Attenuator value	1-9dB ±0.5	10dB ±0.75	20dB ±1	30dB ±1	40dB ±1.5
Environment Data					
Working Temperature	-55℃ ~ +125℃				